

COMPLETE™ CVT Fluid

WITH SYNTHETIC LXE® TECHNOLOGY



LUBEGARD®'s COMPLETE™ CVT FLUID is engineered to meet and exceed OEM fluid requirements eliminating the need to stock multiple fluids. This premium CVT fluid is infused with LUBEGARD's proprietary LXE® Technology that provides superior wear protection with improved friction and shear stability (high film strength).


BENEFITS

- » Protects continuously variable transmissions by minimizing friction between belts and pulleys which defends against fatigue damage
- » Provides superior anti-shudder performance
- » Imparts both shear and oxidative stability to the fluid
- » Remains fluid at low temperatures for excellent operation in cold weather
- » Prevents sludge and varnish build up

PROVEN SUPERIOR IN THIRD PARTY TESTING

FIGURE 1 CVT BELT BOX DURABILITY TEST

The wear analysis of belt elements and pulleys in this durability test shows that LUBEGARD® COMPLETE™ CVT FLUID has superior metal-to-metal wear protection as compared to both the Nissan and Honda CVT fluids.

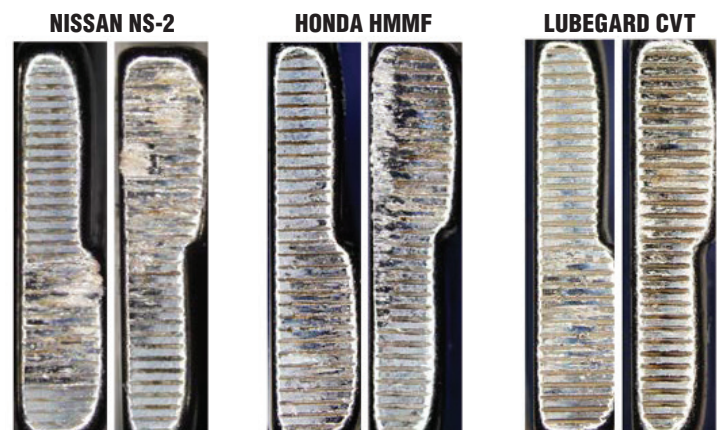

AVAILABILITY


Stock No.	Unit Size	Case Qty
68112	32 oz.	6/c
69450	32 oz.	6/c
FRENCH/ENGLISH PACKAGING		
68232	5 gal.	n/a
68475	55 gal.	n/a
68330	330 gal. tote	n/a

FIGURE 2

LUBEGARD'S COMPLETE CVT FLUID MEETS AND EXCEEDS OEM FLUIDS REQUIREMENTS

LUBEGARD'S COMPLETE CVT FLUID proved equal or superior to OEM fluids in

- » Shear and Oxidative Stability
- » Low Temperature Fluidity
- » Anti Shudder Durability
- » Protection against wear and metal to metal friction

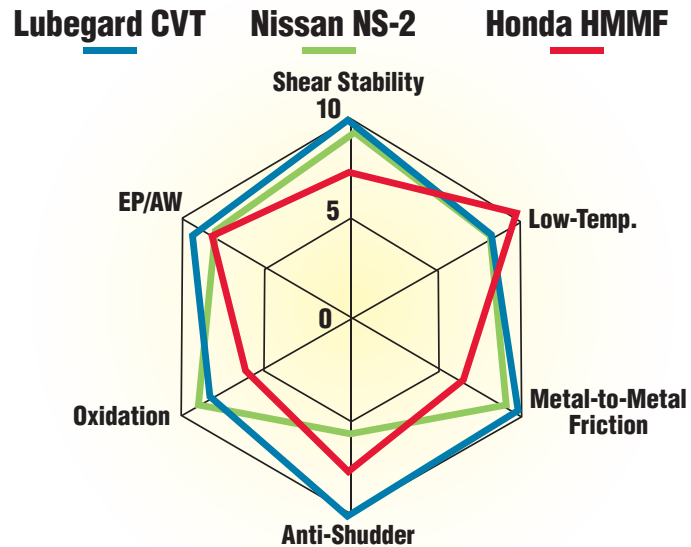

LUBEGARD COMPLETE CVT FLUID IS SUITABLE FOR USE IN THE FOLLOWING APPLICATIONS:

Audi/VW G 052 180; G 052 180 A2	GM Dexron CVT	Mini Cooper CVT; EZL 799A/ Esso CVT EZL 799A	Subaru CV-30
Audi/VW G 052 516; G 052 516 A2	Honda Genuine CVT (HMMF; HCF-2)	Mitsubishi Dia Queen CVTF-J1	Subaru High Torque CVT Fluid
Audi/VW TL 52180	Hyundai CVTF	Mitsubishi Dia Queen CVTF-J4	Subaru K0425Y0710
BMW 83 22 0 136 376	Hyundai SP-CVT 1	Mitsubishi Invecs III CVT	Subaru Lineartronic CVTF
BMW 83 22 0 429 154	Jeep CVTF+4	Mitsubishi Sportsmode 6 CVT	Suzuki CVTF 3320
Daihatsu TC; CVTF-DC; Amix CVTF-DFE	Jeep NS-2	Mopar CVT+4 (VTF)	Suzuki CVTF Green 1
Dodge CVTF+4	Kia CVTF	Motorcraft XT-7-QCFT CVTF (Ford CFT30)	Suzuki CVTF Green 2
Dodge NS-2	Kia SP-CVT 1	Nissan CVT NS-1	Suzuki NS-2
Ford CVT 23	Lexus FE	Nissan CVT NS-2	Suzuki TC
Ford CVT 30	Lexus TC	Nissan CVT NS-3	Toyota CVTF TC
Ford CVT WSS-M2C-933A (for CFT30)	Mazda CVTF	Punch EZL 799A	Toyota FE
Ford Mercon C	Mazda CVTF 3320	Saturn CVT	Toyota TC CVT
Fujiyuuko ECVT	Mazda TC	Saturn DEX-CVT	ZF CVT VT1
Fujiyuuko ICVT	Mercedes Benz 236.20	Shell Green IV	
	Mercedes Benz CVT 28		

For more application information, visit www.Lubegard.com to download our free ATF Conversion and Refill Chart, or call toll free (800) 333-LUBE.

